

3 Install Brackets & Adjustable Shelves



Insert Brackets into Uprights at desired locations. **Note: Install Brackets and shelving at the top first and work down.** Brackets will not fit into upper slot of each Upright.




Shelves are fully adjustable and require no cutting. To adjust width, overlap the shelves making sure the shelf labeled A is placed first on the Brackets and the shelf labeled B is placed ON TOP of A.



Make sure the Bracket locks are unlocked and install shelving making sure that the 'nose' of the Bracket is projecting out through the front edge of the shelf. **Note: For maximum weight capacity, do not insert Bracket into bottom slots of Upright.**

IMPORTANT: Regardless of overall Shelf length, when overlapping sections of shelving, shelves labeled "A" must be placed onto brackets before shelves labeled "B".

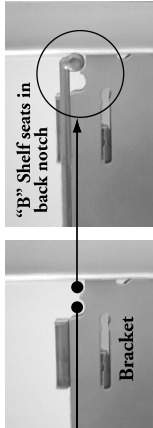


Shelf labeled "A" sits in front notch of Bracket. Shelf labeled "B" sits in back notch. Be sure each shelf slides back as far as possible before locking shelves into Brackets.


! WARNING! If shelves are installed in the incorrect notch, the front of the shelves may fall off the Bracket.

If overlapping 3 sections of shelving, use two A sections and one B section, placing A sections on the outside and gapping the bridge with the B section. For 4 or more overlapping sections, continue alternating between A and B sections, placing A shelves on brackets before B shelves.


4 Install Adjustable Clothes Rods




Install Rod Hanger into bottom of Bracket by tilting it backward until it locks in place.



36" Rods can be used separately or telescoped together up to 6 ft. 26" Rods can be used separately or telescoped together up to 4 ft.



Place End Caps on the end of each Clothes Rod. End Caps will fit either diameter of Rod (as shown above).



After expanding Clothes Rod to desired length, place into Rod Hangers and press down to snap into place. **Note: Do not extend more than 3" past Rod Hangers.**

Fully Adjustable System

- Shelves and Clothes Rods can be adjusted or reconfigured anywhere on this system to meet your storage needs.
- Additional configurations can be created by overlapping shorter shelves to create longer shelves. (Example: overlapping three 2' shelves creates a 6' shelf)
- Change your closet design seasonally to better accommodate summer or winter clothing.

Configurations™ Accessories

The following accessories are sold separately:

- Adjustable Shoe Shelves
- Shoe Rods
- Sliding Basket
- Sliding Pants Rack
- Tie and Belt Organizer

4-8ft Classic Closet Kit

3G59

configurations[™]

by Rubbermaid[®]

Rubbermaid Home Products, Fairlawn, Ohio 44333-3306 • 1-888-895-2110

www.rubbermaidcloset.com • *NewellRubbermaid Company*


Tools Needed for Installation

18-3G59-P0




Please read through the instructions completely and check that you have all parts before beginning. Depending on the configuration you choose to install, you may not use all the components.

Description	Part Number	Quantity
48.25" Shelf (labeled A)	3G62	1
48.25" Shelf (labeled B)	3J62	1
26.25" Shelves (labeled A)	3G60	2
26.25" Shelves (labeled B)	3J60	1
47.5" Uprights	3G64	5
Brackets	3G63	11
48" Hang Rails	3G67	2
Clothes Rod Hangers	3G68	9
48" Inner Clothes Rod	3G76	1
48" Outer Clothes Rod	3G77	1
26" Inner Clothes Rod	3G72	1
26" Outer Clothes Rod	3G73	1
The following parts are packed together in a hardware bag:		
Screws	1603168	13
Anchors	3J65	8
Anchor Key	3J66	1
2" Rail Covers	3J55	2
22" Rail Covers	3J57	4
Clothes Rod End Caps	3G71	6


1 Mount Extendable Hang Rails

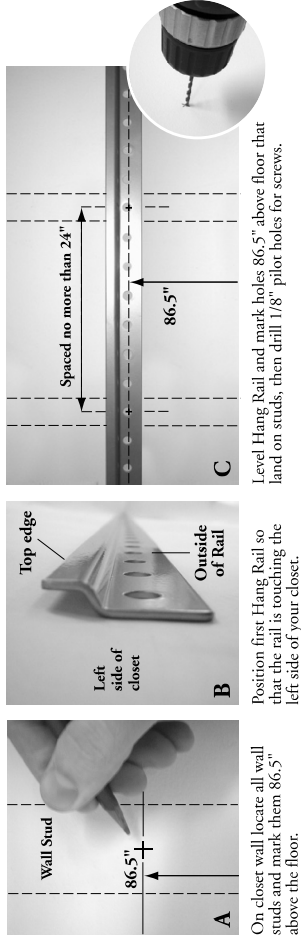

If there is a wall stud within 4" of the LEFT end of the Hang Rail, proceed to step D.

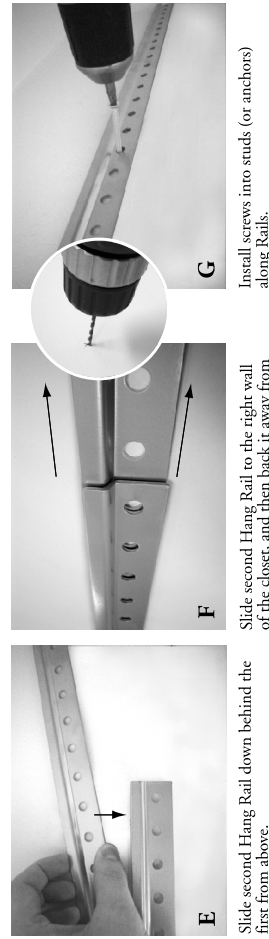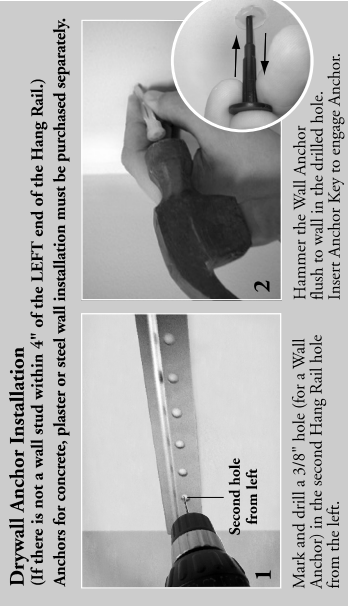

2 Hang Uprights

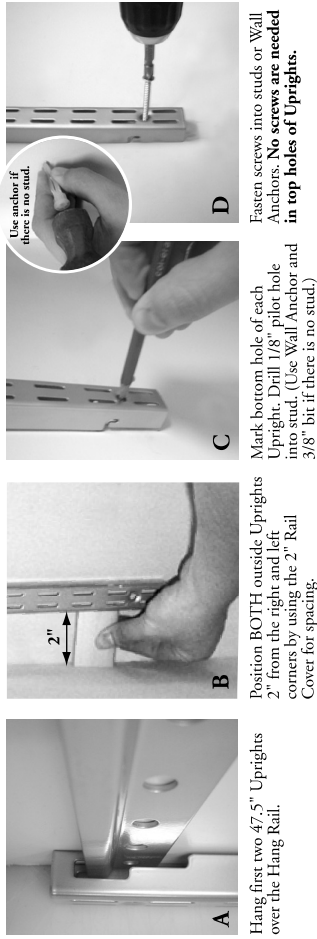

Helpful hint: If the left side of closet is more accessible, space the remaining Uprights from left to right. If the right side of the closet is more accessible, space the remaining Uprights from right to left.

